


序号/RevNo.	名称/Title	文件编号/File No.
1	123塑件主体	QJ/XYT-11135
2	123塑件后盖	QJ/XYT-11136
3	123端子	QJ/XYT-11137

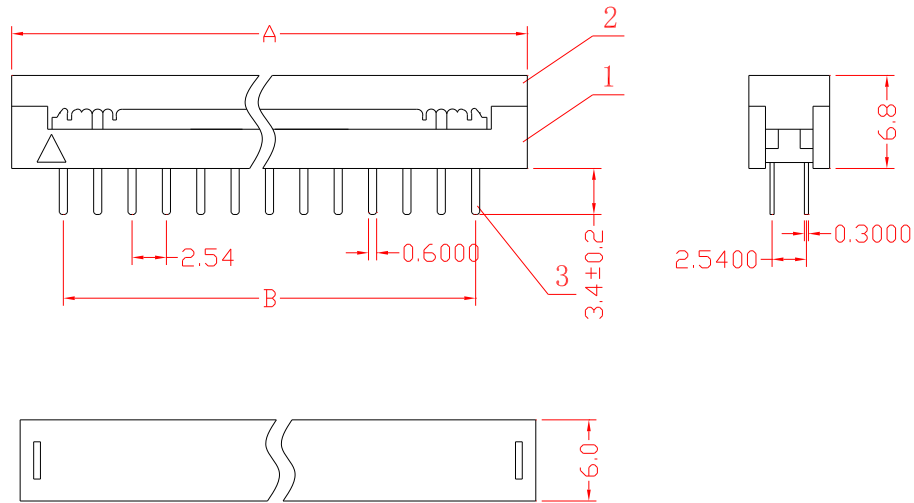

**Specifications:**

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

**Dielectric Withstanding**

Voltage: AC 500V For 1 minute

Operating Temperature:-55°C--+105°C

Contact: Phosphor bronze

Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B
10	17.80	10.16
14	22.82	15.24
16	25.40	17.78
20	30.52	22.86
26	38.12	30.48
30	43.32	35.56
34	48.40	40.64
40	55.92	48.26
50	68.72	60.96
60	81.42	73.66
64	86.38	78.74

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.' ±2'
				.x ±0.1 .x' ±1'
				.xx ±0.05 .xx' ±0.5'
				.xxx ±0.01
				单位/units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date

123产品图

文件编号/File No.  
QJ/XYT-12054

页序/sheet

备注/Remark